


SHIELDED HIGH VOLTAGE CABLE WITH SEPARATE GLAND

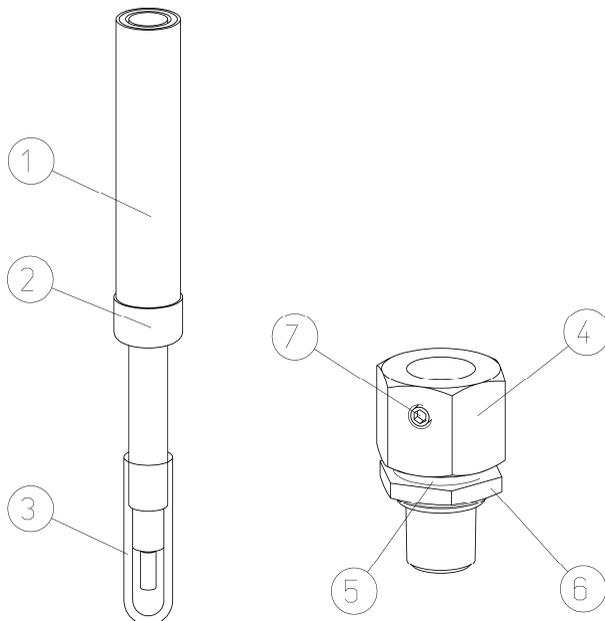

Warning

When working on the equipment, always disconnect the power supply to the equipment

MOUNTING INSTRUCTIONS

- 1 Mount gland (4) into the Simco Power Unit.
- 2 Remove the cap (3) from the HV-cable (1).
- 3 Put the HV-cable through the gland into the Power Unit.
- 4 Lock the HV-cable by screwing the two locking screws (7) on the bush (2) of the HV-cable.
- 5 Connect the cable core to the terminal block of the Power Unit.